

AL-4018S Single Drive El/Az Positioner

Cost Effective, Highly Accurate Tracking Solution

The AL-4018S is a highly accurate and cost-effective elevation over azimuth tracking positioner capable of supporting small to mid-range antenna sizes. The AL-4018S may be ground-based, transportable or shipboard (with additional stabilization), which makes it ideal for aeronautical test telemetry and Earth Observation LEO/MEO Satellite Tracking and navigation.

The modular system can be modified to meet customers' specific requirements based on ORBIT's field-proven building blocks. The system is built for easy assembly and dismantling and includes comprehensive BIT (Built-In-Test) capabilities for the entire pedestal.



Typical Applications



Aeronautical
Test Telemetry



LEO/MEO
Satellite Tracking



Weather
Radar

Supported Antenna Reflector Size

AL-4018S

36cm | 60cm | 1m | 1.2m | **1.8m** | 2.4m | 5m | 10m


Key Features

- Elevation Over Azimuth axes configuration (stabilization is optional)
- Cost-effective, highly accurate pedestal
- Digital servo amplifier to control antenna motion
- Brushless motor and planetary gear assembly
- Modular & easily maintainable
- Robust, reliable and environmentally durable

AL-4018S Operating Specifications*

Parameters	Specification
Bearing Moment Capacity (static)	8150 Nm (6000 ft-lb)
Maximum Payload	390 kg (900 lb)
Delivered Torque	920 Nm (680 ft-lb)
Peak Torque	1500 Nm (1120 ft-lb)
Peak Velocity	Up to 30°/Sec
Peak Acceleration	Up to 30°/Sec ²
Backlash	0.05 deg
Data Take-off Accuracy	± 0.04 deg
Orthogonality	0.02 deg max
Limit-to-Limit Travel	± 200 deg Azimuth** -5 up to +185 deg
Mechanical Stops (Shock absorber mechanism)	-7 up to +187 deg Elevation
Motor Type (with integral encoder and FAIL-SAFE brake)	Brushless
Position Indicator	Absolute Encoder
AC Input Voltage	110/220 V
Power Consumption	3.5 kVA max
Weight (including base riser)	410 kg (900 lb)
Rotary Joint (AZ) ²	option
Slip-Ring (AZ) ²	option
Antenna Motion System	Integrated Digital Servo Amplifier (DSA)
Position Control Interface	RS-422
Operational Safety	Over-current limit, voltage and temperature protection, electrical limit switch and mechanical stop.

General View of AL-4018S

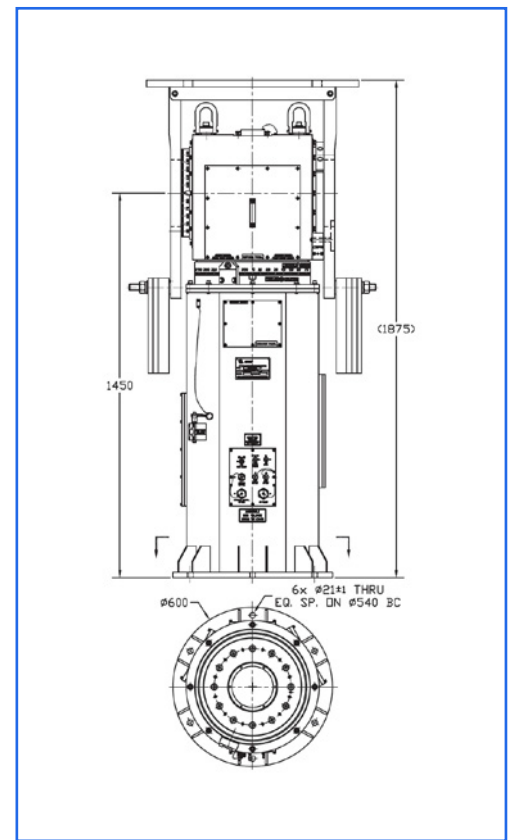

All measurements are subject to change without prior notification

* Specifications apply both for elevation and azimuth axes unless otherwise specified

** When slip-ring or rotary joint options are selected, the azimuth travel is Nx360 degrees

AL-4018S Environmental Specifications

Parameters	Specification
Temperature range	Operating: -25°C to 55°C (-13°F to +131°F)
	Storage: -40°C to 70°C (-40°F to +159°F)
Relative humidity (including condensation)	Operating: Up to 95% @ 25°C (80°F)
	Storage: 100% @ 25°C (80°F)
Rain	< 150 mm/hour (6 in/hour)
Wind speed	Operating - Continuous: 90 km/h (56 mph) for 1.8m dish size 80 km/h (50 mph) for 2.4m dish size
	Operating - Intermittent (gusts) with reduced performance: Up to 100 km/h (62 mph) for 1.8m dish size Up to 90 km/h (56 mph) for 2.4m dish size
	Non-Operating Transport, Survival: Both axes stowed, with elevation axis at zenith (90°): 192 km/h (120 mph) for 1.8m dish size 192 km/h (120 mph) for 2.4m dish size
Altitude	Operating: 3,500 m (12,000 ft)
	Non-operating (transport): 12,000 m (40,000 ft)
Insects and fungi	Designed for tropical regions (using fungus resistant materials)
Salt sea atmosphere, sand, dust, solar radiation, vibration & shock	Suitable for outdoor, ground-mobile applications, operating under environmental conditions encountered in coastal regions